

USB VGA / DVI / HDMI / DisplayPort KVM DigiProcessor

KG1900T / KG6900T / KG8900T / KG9900T

The KG1900T / KG6900T / KG8900T / KG9900T USB VGA / DVI / HDMI / DisplayPort KVM DigiProcessor can centrally connect from the KVM over IP OmniBus Gateway to the target computer. Its digital signal delivers superior signal compensation for greatly enhanced video quality up to 1920 x 1200 @ 60 Hz, 24-bit color depth and raises the data transfer rate faster than traditional KVM solutions. This plug and play KVM DigiProcessor is built with a powerful SoC that provides excellent video compression performance. Its zero-U and light weight design allows for an efficient and tidy installation, providing an ideal space-saving solution. The KVM DigiProcessor is perfectly suited to data center, server room, control room and high tech production line applications.

Note: The ATEN KVM DigiProcessor is only compatible with KG0016 / KG0032. Make sure the KG0016 / KG0032 and the KVM DigiProcessor are connected directly with each other and there is no network switch in between. The SP port on the ATEN DigiProcessor is reserved for future expansion.

KG1900T



KG6900T



KG8900T




KG9900T



Features

- Superior video quality – supports resolutions up to 1920 x 1200 @ 60 Hz; 24-bit color depth
- Distortion-free dynamic video performance up to 100m via a Cat 5e/6 cable
- Virtual Media supports fast transmission speeds up to Read 265Mbps / Write 188Mbps
- Space saving – 0U and compact design with SR mounting hanger for organized server rack installation
- Light-weight aluminum die casting shroud – enhanced passive cooling design with streamlining stripe all around the shroud to help quick radiation
- Bus-powered – no external power adapter required with ultra-low power consumption
- Firmware upgradable
- Smart Card / CAC Reader Support
- HDMI (KG8900T) / DisplayPort (KG9900T) Digital Audio Support

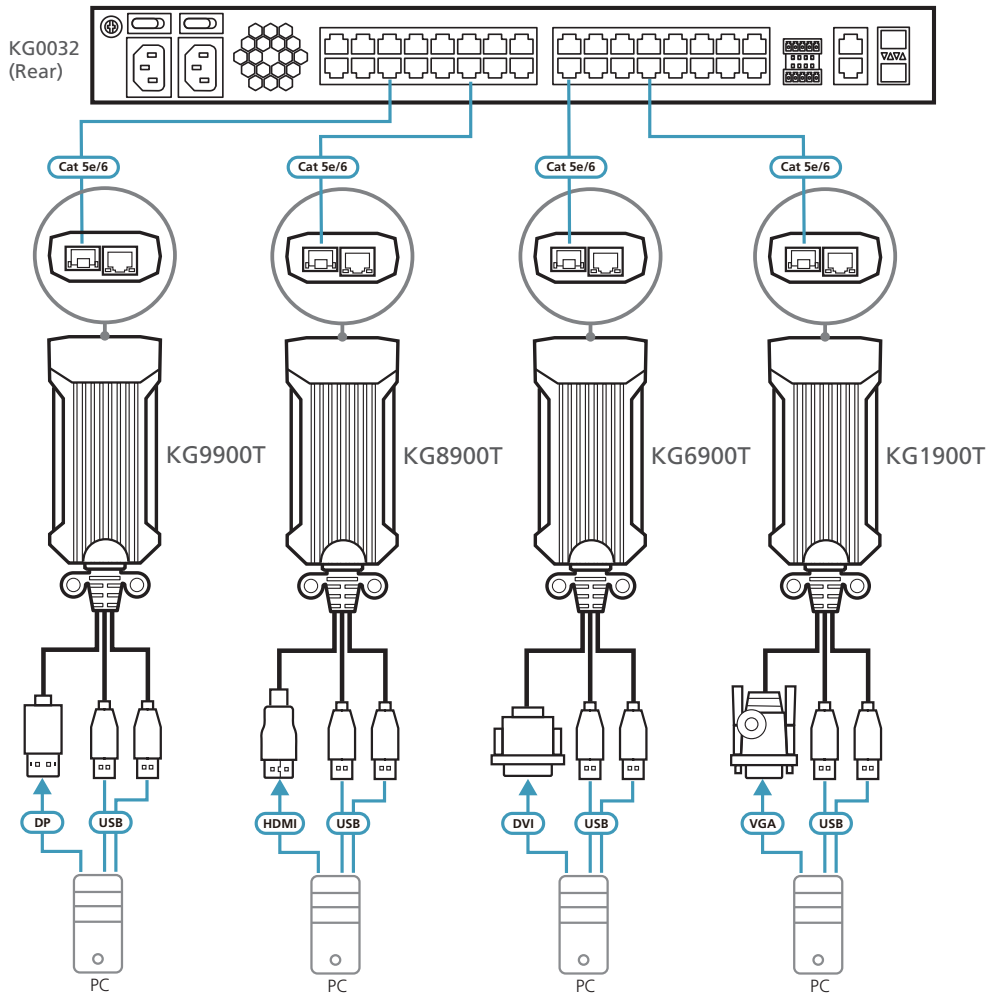

Specifications

	KG1900T	KG6900T	KG8900T	KG9900T
Connectors				
Link		1 x RJ-45 Female (KVM) 1 x RJ-45 Female (SP) (Reserved for future expansion)		
Computer	2 x USB Type-A Male 1 x HDB-15 Male	2 x USB Type-A Male 1 x DVI-D Male	2 x USB Type-A Male 1 x HDMI Male	2 x USB Type-A Male 1 x DisplayPort Male
Switches				
Reset	1 x Semi-recessed Pushbutton			
LEDs				
Link	1 (Green)- On: Active / Blinking: Transmit / Receive)			
10 / 100 / 1000 Mbps	1 (Off / Orange / Green)			
Power	1 (Green)			
Power Consumption	DC 5 V:4.73 W	DC 5 V:3.854 W	DC 5 V:3.745 W	DC 5 V:4.16 W
Environmental				
Operating Temperature	0 – 40 °C			
Storage Temperature	-20 – 60 °C			
Humidity	0 – 95% RH, Non-condensing			
Physical Properties				
Housing	Aluminum Die-casting Housing			
Weight	0.30 kg	0.30 kg	0.27 kg	0.27 kg
Dimensions (L x W x H)	12.20 x 5.80 x 2.58 cm			

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Released: 01/2025 V3.0

© Copyright 2025 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.
 The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

